


LIST 'HEAVY DUTY VENTILATED' K.D. ATHLETIC FIVE TIER LOCKER (9' TO 15' WIDE) (PRODUCT No. HDV \_\_\_\_\_ -5.)

ELEVATION ' / ' /

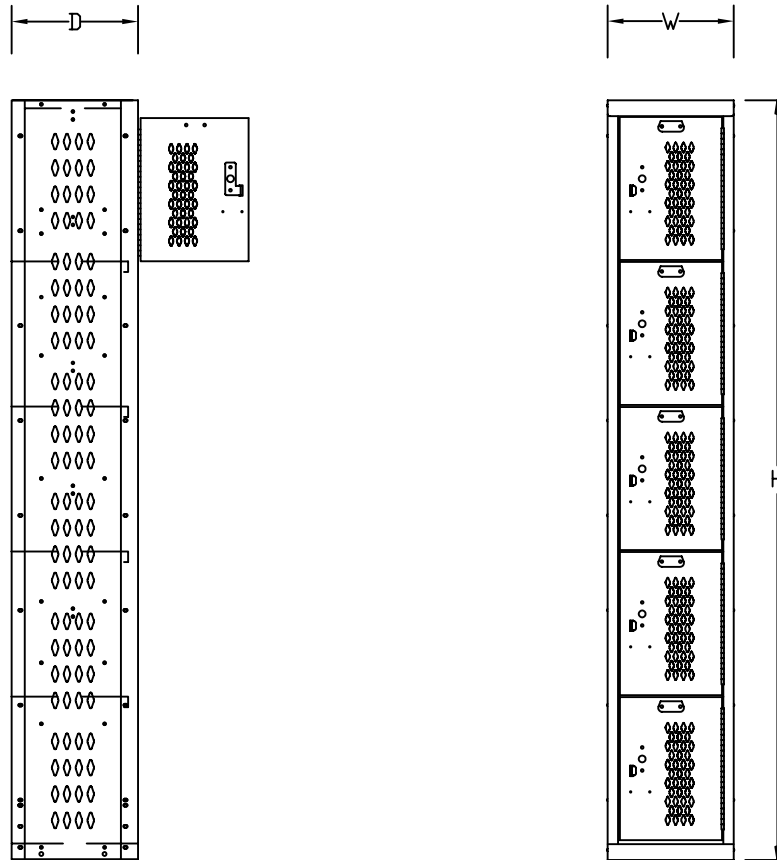

SIDE VIEW

FRONT VIEW

LOCKER DETAILS:

DOOR & FRAME COLOR =  
 BODY COMPONENT COLOR = 729 PARCHMENT OR  
 725 HALLOWELL GRAY

TOP =  
 HANDLE = FRICTION CATCH FINGER PULL  
 DOOR VENTILATION = 7/16" x 15/16" DIAMOND  
 SIDE VENTILATION = 5/8" x 1-1/2" DIAMOND  
 BASE =  
 LOCKS =  
 HINGE = CONTINUOUS PLANO HINGE

CONTRACTOR NOTE  
 ALL CONCRETE BASES SHOULD BE LEVEL AND TROWELED SMOOTH TO ASSURE PROPER INSTALLATION OF THE LOCKERS. ALL FLOORING MATERIAL ATTACHED TO THE FACE OF THE BASE SHOULD BE RECESSED AT LEAST 1/4" FROM THE TOP EDGE OF THE BASE. LOCKERS MUST BE ANCHORED TO WALL.

GAUGES

DOOR = 14 GA., C.R.S.  
 FRAME = 16 GA., C.R.S.  
 TOP = 16 GA., C.R.S.  
 BOTTOM = 16 GA., C.R.S.  
 SHELVES = 16 GA., C.R.S.  
 SIDES = 16 GA., C.R.S.  
 BACKS = 18 GA., C.R.S.

LATCHING: (BOX DOOR) SINGLE POINT FRICTION CATCH WITH DOOR PULL. DOOR WILL ACCEPT BUILT-IN LOCK OR PADLOCK.



THIS DRAWING AND THE INFORMATION ON IT IS THE CONFIDENTIAL PROPERTY OF LIST INDUSTRIES, INC. AND SHALL NOT BE COPIED OR DISCLOSED TO OTHERS WITHOUT WRITTEN PERMISSION. ONLY LIST INDUSTRIES RESERVES THE RIGHT TO ALTER ANY DESIGN. ANY UNAUTHORIZED MODIFICATIONS RELEASES LIST INDUSTRIES FROM ALL LIABILITIES.

TOLERANCES UNLESS SPECIFIED:  
 FRACTIONS: ±1/32      DECIMALS: ±.010      DEGREES: ±1°

Customer: CUSTOMER

Customer Order Number: PO#

Description:

JOB NAME  
 JOB LOCATION

Drawn By:  
 DRAFTER

Acad Number:

Drawing Number:

Checked By:

PAGE NUMBER

FOLDER NUMBER

Date: DATE

Sheet # Of #

Revision:

Scale: NONE