


LIST "MARQUIS STUDENT HDV" K.D. TRIPLE TIER LOCKER (18" OR 24" WIDE) (PRODUCT No. LMH _____ -3_)

ELEVATION ' ' /

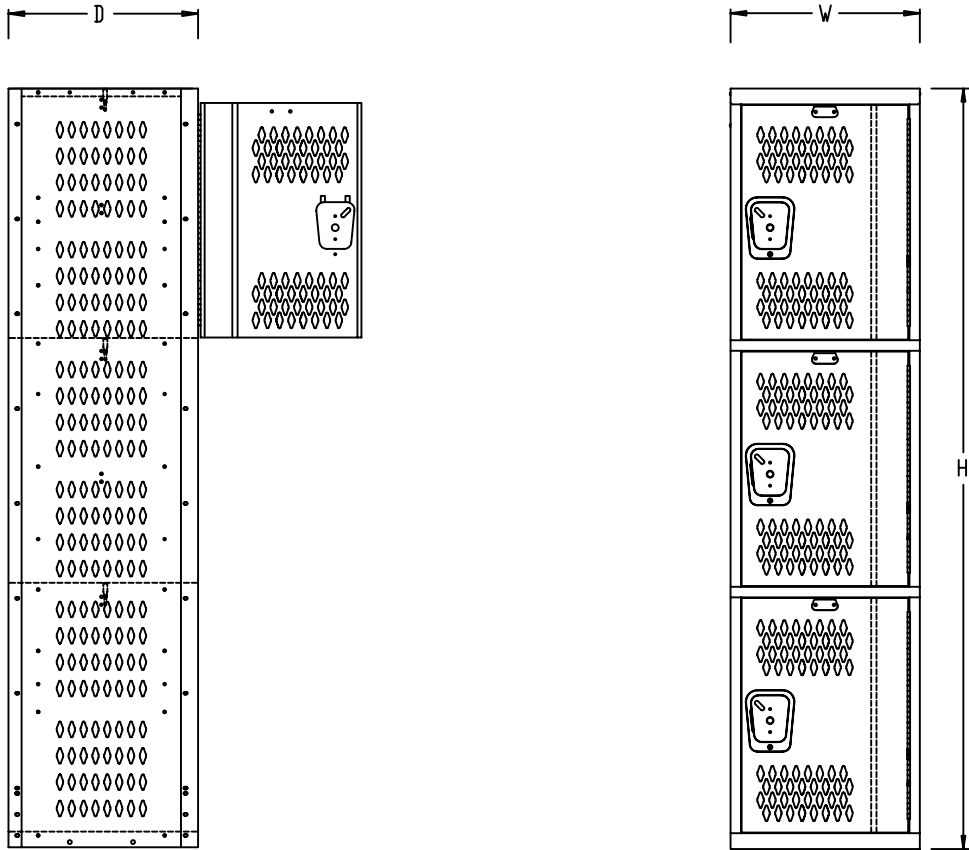

SIDE VIEW

FRONT VIEW

LOCKER DETAILS:

DOOR & FRAME COLOR =
 BODY COMPONENT COLOR = 729 PARCHMENT OR
 725 HALLOWELL GRAY
 TOP =
 HANDLE = SINGLE POINT (S.S. RECESSED DRAWN)
 DOOR VENTILATION = 5/8" x 1-1/2" DIAMOND
 SIDE VENTILATION = 5/8" x 1-1/2" DIAMOND
 BASE =
 LOCKS =
 HINGE = CONTINUOUS PIANO TYPE

CONTRACTOR NOTE

ALL CONCRETE BASES SHOULD BE LEVEL AND TROWELED SMOOTH TO ASSURE PROPER INSTALLATION OF THE LOCKERS. ALL FLOORING MATERIAL ATTACHED TO THE FACE OF THE BASE SHOULD BE RECESSED AT LEAST 1/4" FROM THE TOP EDGE OF THE BASE. LOCKERS MUST BE ANCHORED TO WALL.

GAUGES

DOOR = 14 GA., C.R.S.
 STIFFENER = 18 GA., C.R.S.
 FRAME = 16 GA., C.R.S.
 TOP = 16 GA., C.R.S.
 BOTTOM BASE = 16 GA., C.R.S.
 SHELVES = 16 GA., C.R.S.
 SIDES = 16 GA., C.R.S.
 BACKS = 18 GA., C.R.S.

LATCHING: (WARDROBE) SINGLE POINT RECESSED
 LOCKING DEVICE PREPARED FOR BOTH
 PADLOCK AND BUILT-IN LOCKS.

SUPERIOR

THIS DRAWING AND THE INFORMATION ON IT IS THE CONFIDENTIAL PROPERTY OF LIST INDUSTRIES, INC. AND SHALL NOT BE COPIED OR DISCLOSED TO OTHERS WITHOUT WRITTEN PERMISSION. ONLY LIST INDUSTRIES RESERVES THE RIGHT TO ALTER ANY DESIGN. ANY UNAUTHORIZED MODIFICATIONS RELEASES LIST INDUSTRIES FROM ALL LIABILITIES.

TOLERANCES UNLESS SPECIFIED:
 FRACTIONS: ±1/32 DECIMALS: ±.010 DEGREES: ±1°

Customer: CUSTOMER

Customer Order Number: PO#

Description:

JOB NAME
 JOB LOCATION

Drawn By:
 DRAFTER

Checked By:

Date:

DATE

Scale:
 NONE

Acad Number: PAGE NUMBER

Sheet # Of #

Revision:

Drawing Number:

FOLDER NUMBER