



LIST "MARQUIS PROTECTOR" WELDED CORRIDOR FOUR TIER LOCKER (9' TO 15' WIDE) (PRODUCT No. LMP \_ \_ \_ -4)

ELEVATION / /

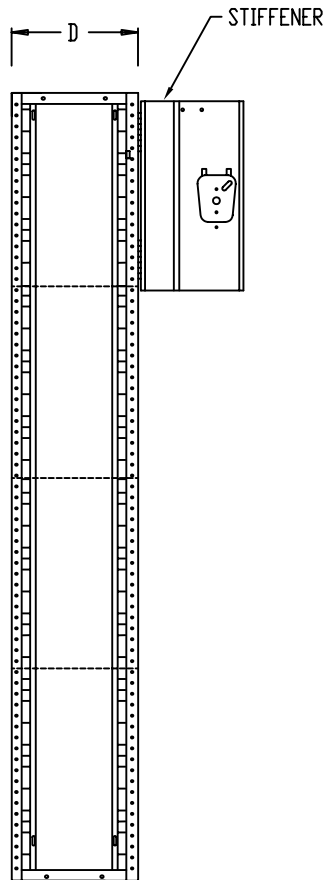

SIDE VIEW

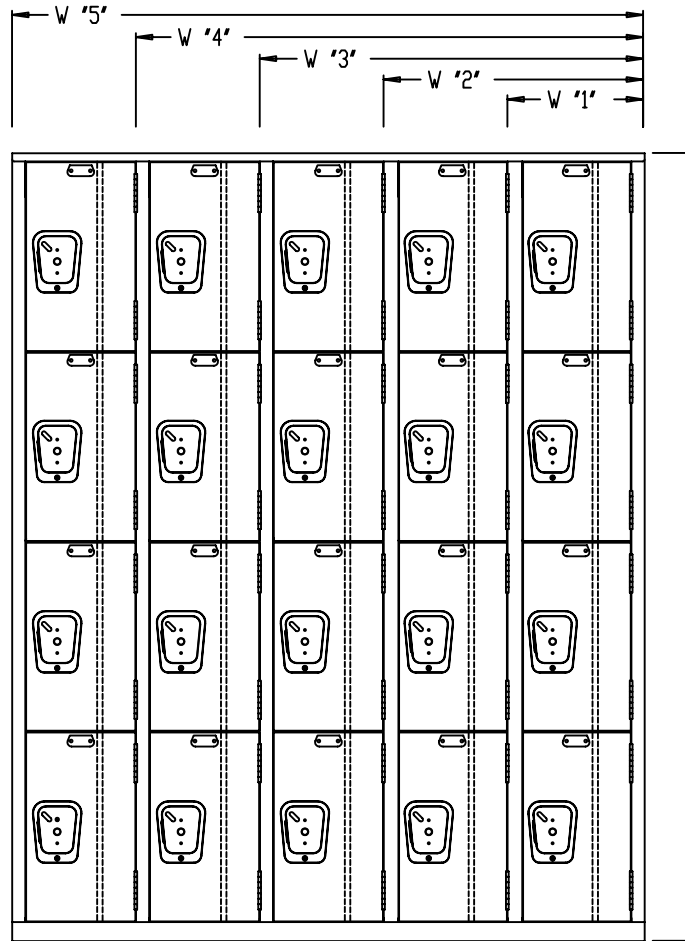

FRONT VIEW

LOCKER DETAILS:

EXTERIOR COLOR =  
 INTERIOR COLOR = SAME AS EXTERIOR  
 TOP =  
 HANDLE = SINGLE POINT (S.S. RECESSED DRAWN)  
 DOOR VENTILATION = SOLID  
 SIDE VENTILATION = SOLID  
 BASE =  
 LOCKS =  
 HINGE = 7-KNUCKLE, 13 GA. BUTT  
 HINGE WELDED TO DOOR &  
 RIVETED TO FRAME

CONTRACTOR NOTE

ALL CONCRETE BASES SHOULD BE LEVEL AND TROWELED SMOOTH TO ASSURE PROPER INSTALLATION OF THE LOCKERS. ALL FLOORING MATERIAL ATTACHED TO THE FACE OF THE BASE SHOULD BE RECESSED AT LEAST 1/4" FROM THE TOP EDGE OF THE BASE. LOCKERS MUST BE ANCHORED TO WALL.

GAUGES

DOOR = 14 GA., C.R.S.  
 STIFFENER = 18 GA., C.R.S.  
 FRAME = 16 GA., C.R.S.  
 TOP = 16 GA., C.R.S.  
 BOTTOM = 16 GA., GALVANNEAL  
 HAT SHELVES = 16 GA., GALVANNEAL  
 INT/MED SHELVES = 16 GA., GALVANNEAL  
 SIDES = 18 GA., C.R.S.  
 BACKS = 18 GA., C.R.S.

LATCHING: (BOX DOOR) SINGLE POINT RECESSED LOCKING DEVICE PREPARED FOR BOTH PADLOCK AND BUILT-IN LOCKS.

HINGES: (BOX DOOR) TWO HINGES ON LOCKER DOORS 36" AND UNDER.

**SUPERIOR**

THIS DRAWING AND THE INFORMATION ON IT IS THE CONFIDENTIAL PROPERTY OF LIST INDUSTRIES, INC. AND SHALL NOT BE COPIED OR DISCLOSED TO OTHERS WITHOUT WRITTEN PERMISSION. ONLY LIST INDUSTRIES RESERVES THE RIGHT TO ALTER ANY DESIGN. ANY UNAUTHORIZED MODIFICATIONS RELEASES LIST INDUSTRIES FROM ALL LIABILITIES.

TOLERANCES UNLESS SPECIFIED:  
 FRACTIONS: ±1/32      DECIMALS: ±.010      DEGREES: ±1°

Customer: CUSTOMER

Customer Order Number: PO#

Description:

JOB NAME  
 JOB LOCATION

Drawn By:  
 DRAFTER

Checked By:

Date:

DATE

Scale:

NONE

Acad Number: PAGE NUMBER

Sheet # Of #

Revision:

Drawing Number:

FOLDER NUMBER