


LIST "STANDARD K.I.D." SIXTEEN PERSON LOCKER (PRODUCT No. SK \_\_\_\_\_ -16)

ELEVATION ' ' /

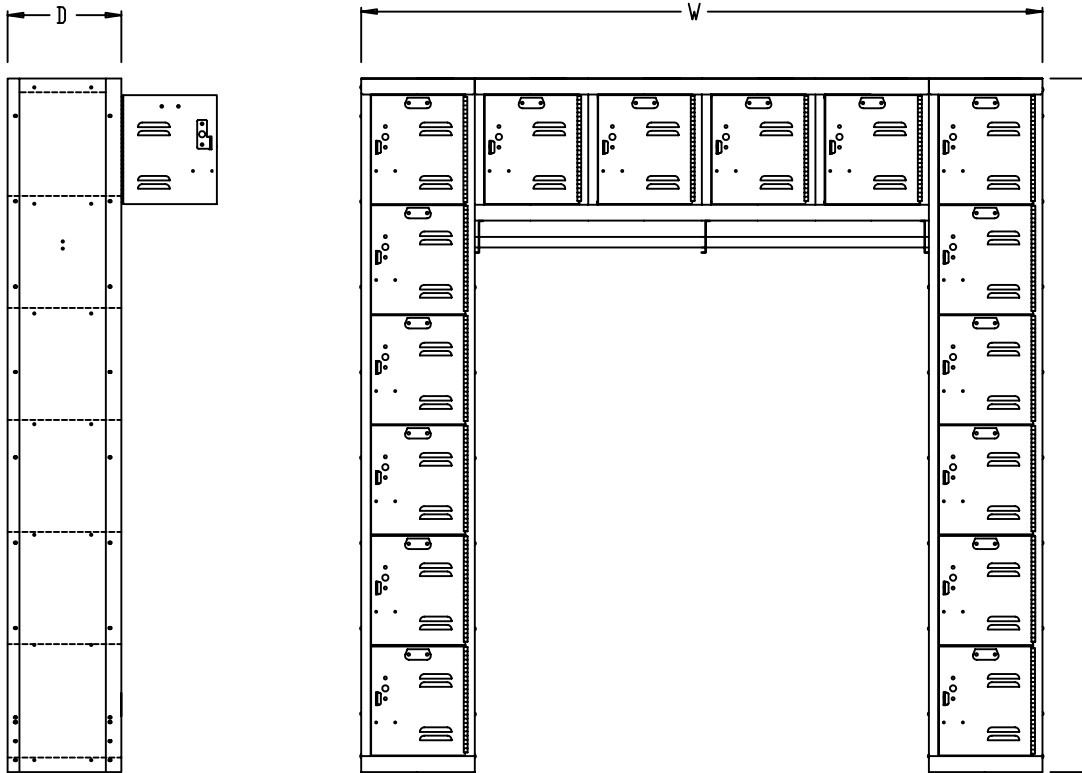

SIDE VIEW

FRONT VIEW

**LOCKER DETAILS:**

DOOR & FRAME COLOR =  
 BODY COMPONENTS COLOR = 729 PARCHMENT  
 TOP =  
 HANDLE = FRICTION CATCH FINGER PULL  
 DOOR VENTILATION = 3" LOUVERS  
 SIDE VENTILATION = SOLID  
 BASE =  
 LOCKS =  
 HINGE = FULL LENGTH, STAKED PIANO  
 HINGE WELDED TO DOOR &  
 RIVETED TO THE FRAME

**CONTRACTOR NOTE**

ALL CONCRETE BASES SHOULD BE LEVEL AND TRIMMED SMOOTH TO ASSURE PROPER INSTALLATION OF THE LOCKERS. ALL FLOORING MATERIAL ATTACHED TO THE FACE OF THE BASE SHOULD BE RECESSED AT LEAST 1/4" FROM THE TOP EDGE OF THE BASE. LOCKERS MUST BE ANCHORED TO WALL.

**GAUGES**

DOOR = 18 GA., C.R.S.  
 FRAME = 16 GA., C.R.S.  
 TOP = 24 GA., C.R.S.  
 BOTTOM = 24 GA., C.R.S.  
 SHELVES = 24 GA., C.R.S.  
 SIDES = 24 GA., C.R.S.  
 BACKS = 24 GA., C.R.S.  
 COAT ROD = 7/8" DIA. 14 GA., E.R.W. PLATED TUBE

LATCHING: (BOX DOOR) SINGLE POINT FRICTION CATCH WITH DOOR PULL. DOOR WILL ACCEPT BUILT-IN LOCK OR PADLOCK.

**SUPERIOR**

THIS DRAWING AND THE INFORMATION ON IT IS THE CONFIDENTIAL PROPERTY OF LIST INDUSTRIES, INC. AND SHALL NOT BE COPIED OR DISCLOSED TO OTHERS WITHOUT WRITTEN PERMISSION. ONLY LIST INDUSTRIES RESERVES THE RIGHT TO ALTER ANY DESIGN. ANY UNAUTHORIZED MODIFICATIONS RELEASES LIST INDUSTRIES FROM ALL LIABILITIES.

TOLERANCES UNLESS SPECIFIED:  
 FRACTIONS: ±1/32      DECIMALS: ±.010      DEGREES: ±1°

Customer: CUSTOMER

Customer Order Number: PO#

Description:

JOB NAME  
 JOB LOCATION

Drawn By:  
 DRAFTER

Checked By:

Date:  
 DATE

Scale:  
 NONE

Acad Number: PAGE NUMBER

Sheet # Of #

Revision:

Drawing Number:

FOLDER NUMBER